




ORSAN MPS

4000H

DOUBLE NEEDLE FOUR THREAD OVERLOCK & CHAIN STITCH SEWING MACHINES

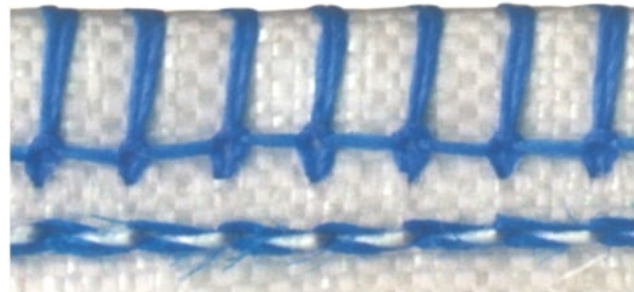

- WITH TOP AND BOTTOM FILLER CORD FEEDS, DEVELOPED FOR BIG BAG (FIBC) PRODUCERS
- DOUBLE TRANSPORT FROM ABOVE AND BELOW
- TO BE USED FOR SEWING HEAVY BIG BAGS

The 4000 series machine are designed for Big Bag producers to sew overlock and safety stitches simultaneously. They possess superior characteristics as well as important modifications to sew today's more difficult Big Bags more efficiently compared to similar machines.

4000 H - Series with Pneumatic Presser Foot System

CHARACTERISTICS	TECHNICAL SPECIFICATIONS	
Feeding of filler cord from above and below. Low spare part consumption. Heat cutting can be mounted if desired.	Maximum speed	1400 rpm
	Needle(S)	Two needles
	Standard Needle	9853 GA 430 / 172
	Threads	Four threads
	Stitch spacing	6 - 13 mm.
	Space between two needles	5 mm.
	Overlock stitch width between	10 mm. and 17 mm.
	Maximum stitch height	22 mm.

ARMSTRONG

501, 'Sarap' | Opp. Navjivan Press | B/H. Gujarat Vidyapith | Ahmedabad - 380 014 (India)

Tele : +91 79 2754 3747 | 2754 3551 | 2754 4394 • Fax : +91 79 2754 3552

Email : armstrong@stitchman.com • Web site : www.stitchman.com | www.armstrongsewing.com



ISO 9001 - 2008